

- STEEL TYPE
- ROLL DIES
- HAND STAMPS
- HOT STAMPS
- DIE INSERTS
- CUSTOM ENGRAVING
- E.D.M. SERVICES
- MARKING MACHINERY

# MONODE™ STEEL STAMP, INC.


149 High Street • New London, Ohio 44851  
 Phone: 419-929-3501 • Fax: 419-929-8806



*Waldorf*  
 Marking Devices™

## MODEL WPT-2.5HS


### Hot Stamping Machines

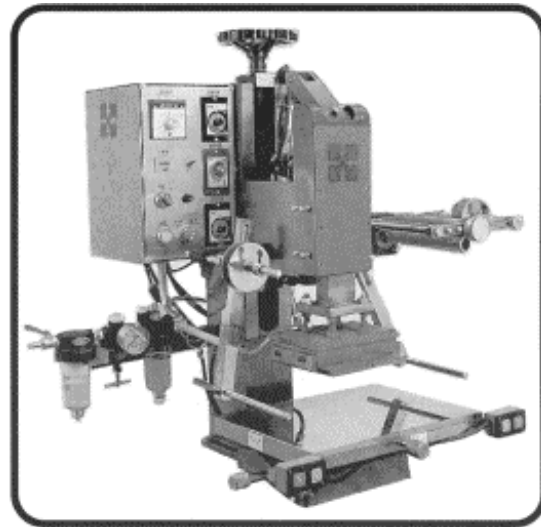

WALDORF MODEL WPT-2.5HS: PNEUMATIC TOGGLE 2 1/2 TON HOTSTAMPER. COMPLETE WITH THERMOSTATIC CONTROLS, AIR FILTER AND REGULATOR, DOUBLE PALM BUTTON SAFETY CONTROLS, AND ELECTRIC FOIL FEED.

#### ENGINEERING SPECIFICATIONS:

MAXIMUM DIE SURFACE:	
METAL DIE: STEEL OR BRASS:	2.5 SQ IN. (16 SQ CM)
SILICONE RUBBER:	5 SQ IN. (30 SQ CM)
HEATING HEAD DOVETAIL:	4.5 X 7 IN. (120 X 180 MM)
HEATERS:	4 - 250 WATT CARTRIDGE
	75 - 700 F (26 - 400 C)
	110 V AC / 60Hz
POWER:	4.0 CF/M, 80 PSI
AIR:	12 IN. (300 MM)
ADJ. VERTICAL OPENING - MAX:	2 IN. (50 MM)
STROKE:	8 IN. (200 MM)
THROAT DEPTH:	11 X 15 IN. (280 X 380 MM)
FIXTURE SURFACE:	ELECTRIC MOTOR, TIMER
FOIL FEED:	36 X 30 X 42 IN. 450 LBS
SHIPPING SIZE AND WEIGHT:	920 X 770 X 1070 MM 200 KG

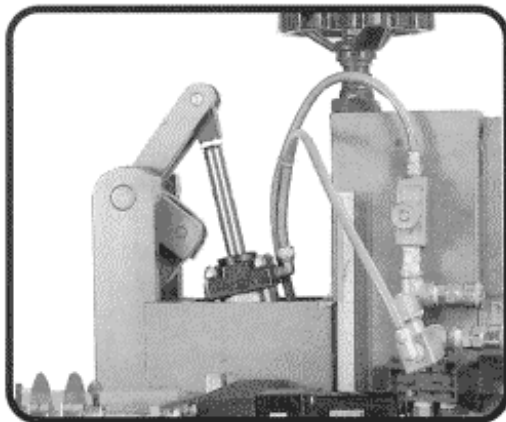


**The right choice. The right price.**


- STEEL TYPE
- ROLL DIES
- HAND STAMPS
- HOT STAMPS
- DIE INSERTS
- CUSTOM ENGRAVING
- E.D.M. SERVICES
- MARKING MACHINERY

**MONODE™ STEEL STAMP, INC.**


149 High Street • New London, Ohio 44851  
 Phone: 419-929-3501 • Fax: 419-929-8806



## MODEL WP-1HS

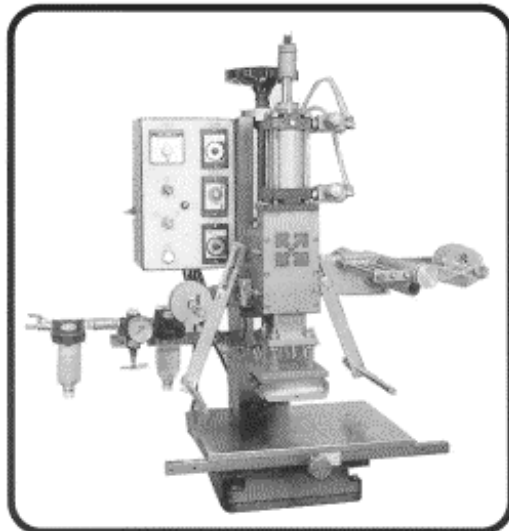

## MODEL WHHS

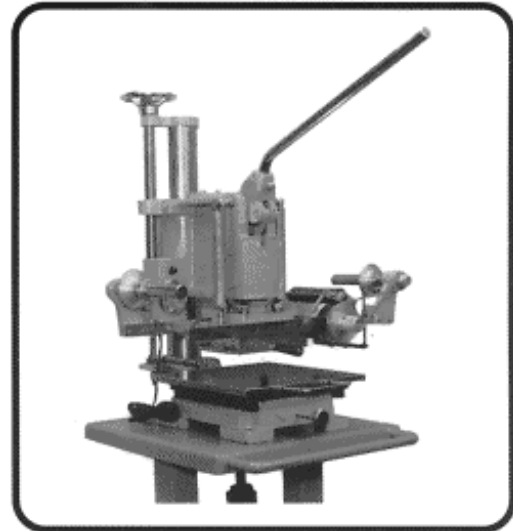

**WALDORF MODEL WP-1HS: PNEUMATIC ONE TON HOTSTAMPER. COMPLETE WITH THERMOSTATIC CONTROLS, AIR FILTER AND REGULATOR, DOUBLE SAFETY PALM BUTTONS, AND ELECTRIC FOIL FEED.**

**WALDORF MODEL WHHS: MECHANICAL TOGGLE HAND HOTSTAMPER. COMPLETE WITH THERMOSTATIC CONTROLS, SPRING RETURN, MECHANICAL FOIL FEED, AND ADJUSTABLE SLIDING TABLE.**

### ENGINEERING SPECIFICATIONS:

### ENGINEERING SPECIFICATIONS:

#### MAXIMUM DIE SURFACE RECOMMENDATIONS:

METAL DIE: STEEL OR BRASS: 1 SQ. IN. (6.5 SQ CM)  
 SILICONE RUBBER: 2 SQ. IN. (13 SQ CM)

HEATING HEAD DOVETAIL: 5.5 X 6.5 IN. (140 X 170 MM)

HEATING HEAD DOVETAIL: 4 X 4.5 IN. (100 X 120 MM)  
 HEATERS: 4 - 250 WATT CARTRIDGE  
 75 - 700 F (26 - 400 C)

HEATERS: 1 - 600 WATT STRIP  
 72 - 570 F (26 - 300 C)

POWER: 110 V AC / 60Hz  
 AIR: 4.0 CF/M, 80 PSI  
 ADJ. VERTICAL OPENING - MAX: 12 IN. (300 MM)  
 STROKE: 1 3/8 IN. (60 MM)  
 THROAT DEPTH: 8 IN. (200 MM)  
 FIXTURE SURFACE: 11 X 15 IN. (280 X 380 MM)  
 FOIL FEED: TIMED ELECTRIC MOTOR  
 SHIPPING SIZE AND WEIGHT: 36 X 30 X 40 IN. 450 LBS.  
 920 X 770 X 1070 MM 200 KG

POWER: 110 V AC / 60 Hz

ADJ. VERTICAL OPENING - MAX: 7.5 IN. (200 MM)  
 STROKE: 1.25 IN. (30 MM)  
 THROAT DEPTH: 7.75 IN. (200 MM)  
 FIXTURE TABLE: 11 X 11 IN. (300 X 300 MM)

FOIL FEED: AUTOMATIC MECHANICAL  
 SHIPPING SIZE AND WEIGHT: 30 X 25 X 35 IN. 200 LBS.  
 750 X 630 X 840 MM 94KG