

P2DP

- ◆ Robust Construction
- ◆ Pneumatic
- ◆ Portable
- ◆ Reliable Working
- ◆ Easy to Use










CONTROLLER



C2 Controller

- ◆ Strong steel construction
- ◆ On screen help on every screen
- ◆ 7" Resistive touch screen for industrial use
- ◆ Simple to use and understand user interface
- ◆ Multilingual user interface in many different languages
- ◆ Pneumatic
- ◆ Mark alphanumeric text, DXF or PLT logos, Datamatrix or QR Code barcodes
- ◆ Multiple fonts are available to choose.
- ◆ CSV File Marking and Barcode Printer Interface
- ◆ Inputs & Outputs for easy integration with other machines and devices.
- ◆ RS232 and Rs485 ports for I/P and O/P Comm. with PC or PLC.
- ◆ USB Port for File Transfer
- ◆ High speed fan
- ◆ Standard 2 axis upgrade to 3 or 4 axis
- ◆ 185mm x 285mm x 112.50mm
- ◆ Weighs 3kg
- ◆ 110-240V AC power supply
- ◆ 24V 5A electrical consumption

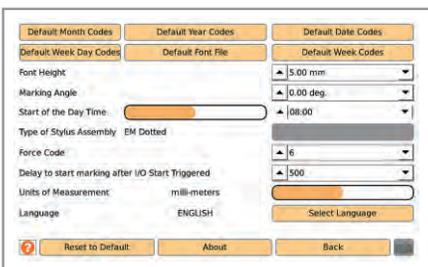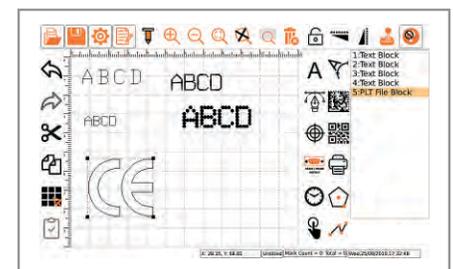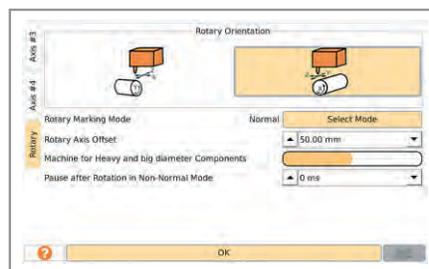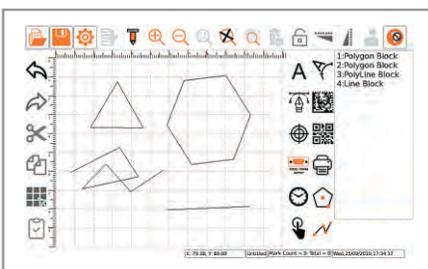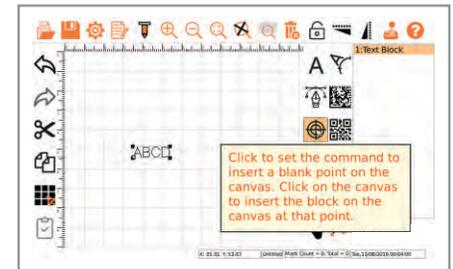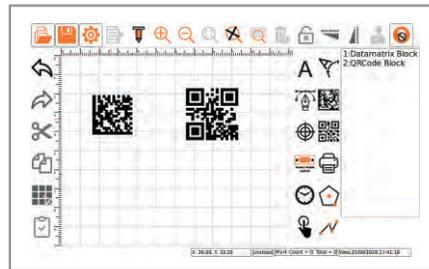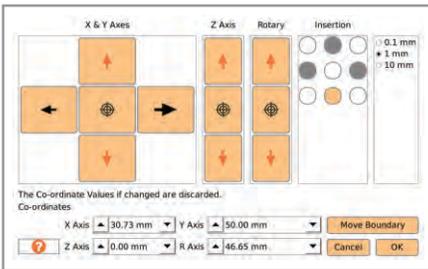

P2DP

- ◆ 150x50mm
- ◆ Pneumatic
- ◆ Linear X & Y Axis for consistent depth across the complete marking window
- ◆ Portable
- ◆ Robust aluminum body
- ◆ 214.50mm x 262.50mm x 246.5mm
- ◆ 5kg weight
- ◆ High precision LM guides on both X and Y axis
- ◆ 2 axis
- ◆ 16 pin Military Grade connector
- ◆ Front supporting handle and rear combo handle for manual holding and standing
- ◆ Flat fixture with 'V' groove and rectangular permanent magnets for holding on component
- ◆ 6mtr standard cable
- ◆ Component holding or resting attachment are customizable
- ◆ 6-8 bar air pressure
- ◆ Pu8 (8mm OD) tubing
- ◆ 30mm distance setting adjustment
- ◆ Optional combo attachment with CF01 holding stand



Accessories



Combo Attachment



Stylus



Front Fixture
with Magnets



Front Fixture
'V' Groove with Magnets

Monode Marking Products, Inc.

Office:

9200 Tyler Blvd., Mentor, OH 44060

T: (440) 975-8802 | F: (440) 975-8836

E: sales@monode.com | W: www.monode.com